

# BAM™ Barrier Delineator

## FLEXIBLE HIGHWAY BARRIER DELINEATOR

Designed for top and side-mounted applications.



**Unique, flexible hinge can reduce replacement costs.**

### Bam Delineator Features:


BAM is available with reflective sheeting or acrylic reflective lens. Sheeting provides 11.5 square inches of reflectivity. Acrylic lens provides 8.9 square inches.

Lens colors include amber, red, clear or blue.

Standard sheeting colors are white and yellow. Other colors available.

Reflective sheeting meets all state and federal specifications, and is available in Hi-Intensity and Fluorescent grade.

BAM accepts sheeting or lenses on one or both sides.

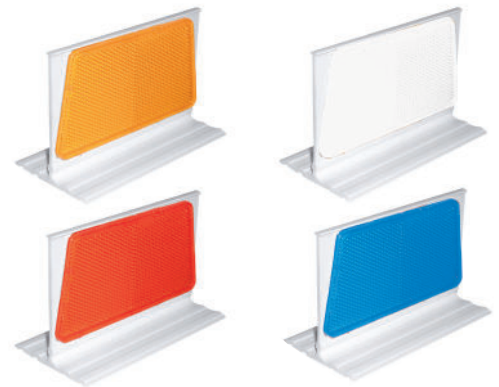

BAM Delineator, clear lens, on side, Quik-Mark Object Marker, on top.

### BAM Installation Instructions:

Always follow adhesive manufacturers' application instructions.

#### Solvent Base Construction Adhesive:

- 1.) Apply adhesive evenly to the bottom of BAM.
- 2.) Install BAM to the concrete barrier wall.
- 3.) As soon as the adhesive makes full contact with the barrier wall, pull BAM off the wall.
- 4.) Allow the adhesive to dry prior to final installation to ensure positive alignment of BAM.

